

1. Safety single phase transformers

SINGLE PHASE > PB400

POLYLUX



Features

Dry type transformer

IP-20 enclosure:

Last generation V-0 fireproof polymer box according to UL94 up to 2500 VA

Metallic box painted with epoxy polyester resin from 3150 VA

Safety class I, convertible in class II up to 2500 VA

Includes LED functioning indicator

Full power capacity in every connection


Voltage selection through metallic bridges (included)

Optional protection fuse

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	400 VA
Input voltage	230/400/460 V
Output voltage	12/24 V
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	ANAN
Ambient temperature	25°C
Temperature rise	Class B
Insulation	Class B - 130°C
Windings	Class HC - 220°C
Leakage current	4,6 kV (1 min, 50 Hz) pri-sec - 3,2 kV (1 min, 50 Hz) pri-earth - 2,5 kV (1 min, 50 Hz) sec-earth
Standards	IEC/EN/UNE-EN 61558, CE
Mounting	Screws
Weight	4,8 Kg
Dimensions	118x138x131x121x88 mm 6Ø

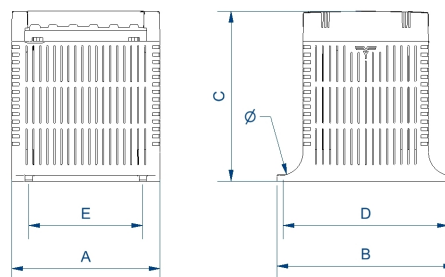

+ Info www.polylux.com

Productos equivalentes