

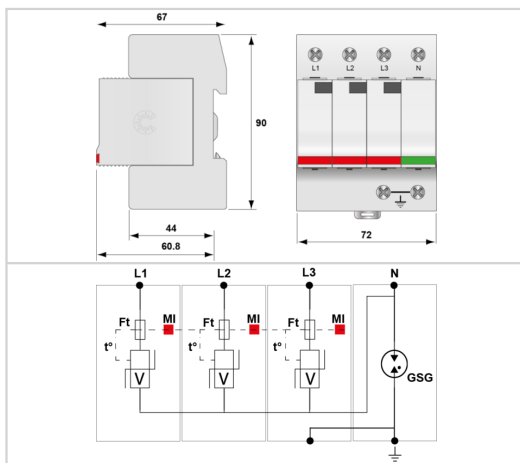


CITEL

DS44-230/G



- Type 2 AC Multipolar surge protector
- In : 20 kA
- I<sub>max</sub> total : 40 kA
- Pluggable module for each phase
- Remote signaling option
- NF EN 61643-11, CEI 61643-11 compliance
- UL1449 ed.17

**Electrical Characteristics**

SPD type (following IEC tests)		2
Network		230/400 V 3-phase+N
AC system		TT-TNS
Max. AC operating voltage L-N	U <sub>c</sub>	255 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. (Without disconnection)	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn (Without disconnection or with safety disconnection)	UT	440 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) (Without disconnection or with safety disconnection)	UT	1200 V/300A/200 ms withstand
Residual Current (Leakage current to Ground)	I <sub>pe</sub>	None
Follow current	I <sub>f</sub>	None
Nominal discharge current (15 x 8/20 μs impulses)	I <sub>n</sub>	20 kA
Max. discharge current (max. withstand @ 8/20 μs by pole)	I <sub>max</sub>	40 kA
Total Maximal discharge current (max. total withstand @ 8/20 μs)	I <sub>max</sub> Total	40 kA
Connection mode(s)		L/N and N/PE
Protection mode(s)		Common/Differential mode
Residual voltage at 5 kA ( @ 5 kA [8/20μs])	Up-5kA	0.9 kV
Protection level L/N ( @ In [8/20μs])	Up L/N	1.25 kV
Protection level L/PE ( @ In [8/20μs])	Up L/PE	1.5 kV
Admissible short-circuit current	I <sub>sc</sub>	25000 A

**Mechanical Characteristics**

Technology		MOV+GDT
SPD configuration		3-phase+Neutral
Connection to Network		By screw terminals: 2.5-25 mm <sup>2</sup> / by bus
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (DIN 60715)
Housing material		Thermoplastic UL94-V0
Operating temperature	T <sub>u</sub>	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection
Disconnection indicator		1 mechanical indicator by pole
Spare module(s)		DSM40-230+DSM40G-600
Remote signaling of disconnection		option DS44S-230/G: output on changeover contact
Dimensions		See diagram
Weight		0.325 kg

**Disconnectors**

Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Fuses		Fuses type gG - 50 A

**Standards**

Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 4ed.
Certification		UL / CSA /EAC

**Part number**

461512

