

## Index Plungers compact• with hexagon collar

22110.0107



### Product Description

Types with / without lock have the same building height.  
Due to a thread recess the index plungers can be completely screwed in.  
For indexing purposes.

### Material

#### Body

- Steel, blackened

#### Locking pin

- Steel, hardened

#### Knob

- Thermoplastic PA 6, black, dull

### Assembly

The screw length can be adapted by distance collars for index plungers (EH 22120.).

### More information

### Notes


Knob not removable.  
Lock nuts have to be purchased separately.

- RoHS compliant
- REACH compliant

### Further products

- Mounting Blocks, for index plungers and index bolts zinc die-cast
- Locating Bushings, for index bolts and index plungers
- Distance Collars, for index plungers

### Drawing

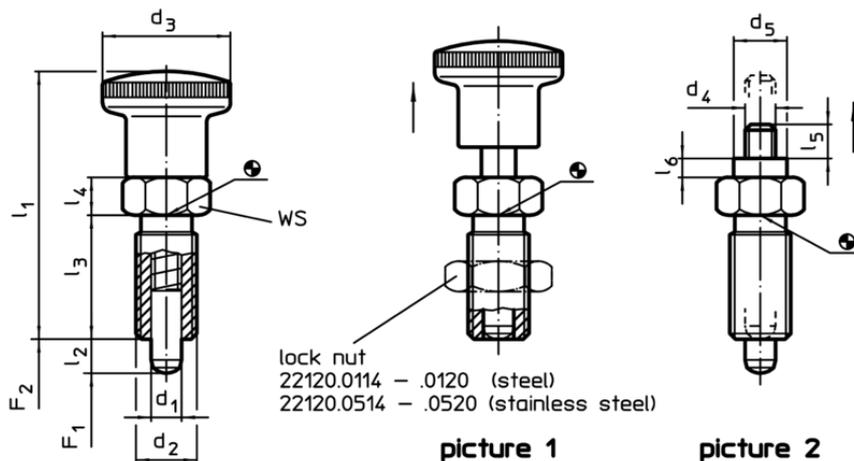

### Order information

Dimensions							WS	Spring load <sup>1)</sup>		Temperature		Weight	Ref. No.		
d <sub>1</sub>	l <sub>2</sub>	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>3</sub>	l <sub>4</sub>	F <sub>1</sub>	F <sub>2</sub>	min.	max.	[g]				
-0,02	min.						~	~							
-0,04															
[mm]													[N]	[°C]	[g]
<b>with knob – picture 1, steel</b>															
5	8	M10 x 1	19	40	18	6	12	5	18	-30	80	18	22110.0107		

<sup>1)</sup> statistical average value

Accessories

	Dimensions d <sub>2</sub> [mm]	 [g]	Ref. No.
<b>Lock Nuts, steel</b>			
	M10 x 1	5,2	22120.0115